

Zoom

Display Reset

Current Reset

Move Image

X Y Z

Reset




Center Ant Image

Mouse Operation

Normal Viewing

Add Conn Wires

Move Wire Ends

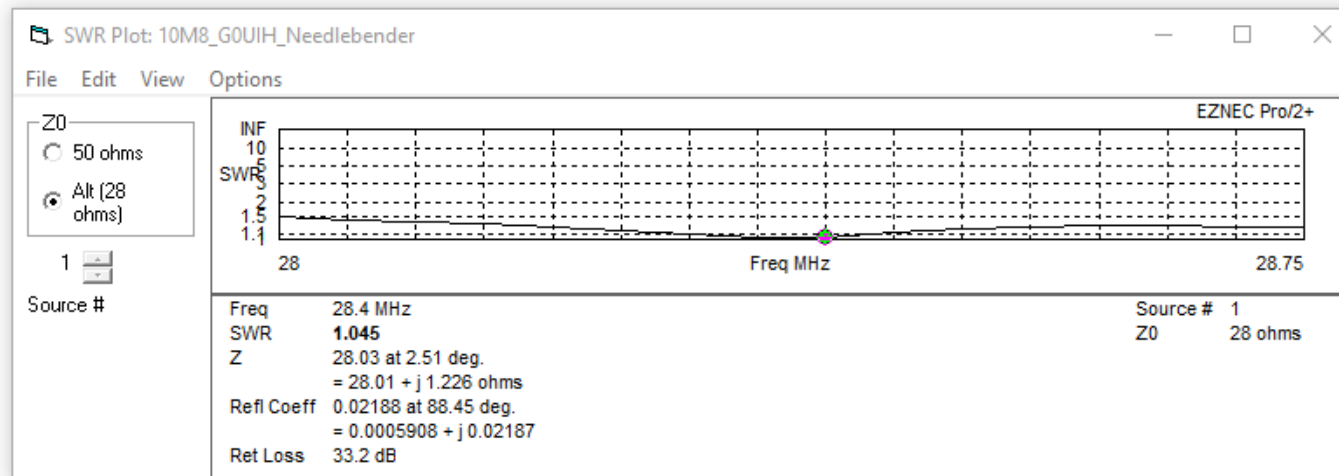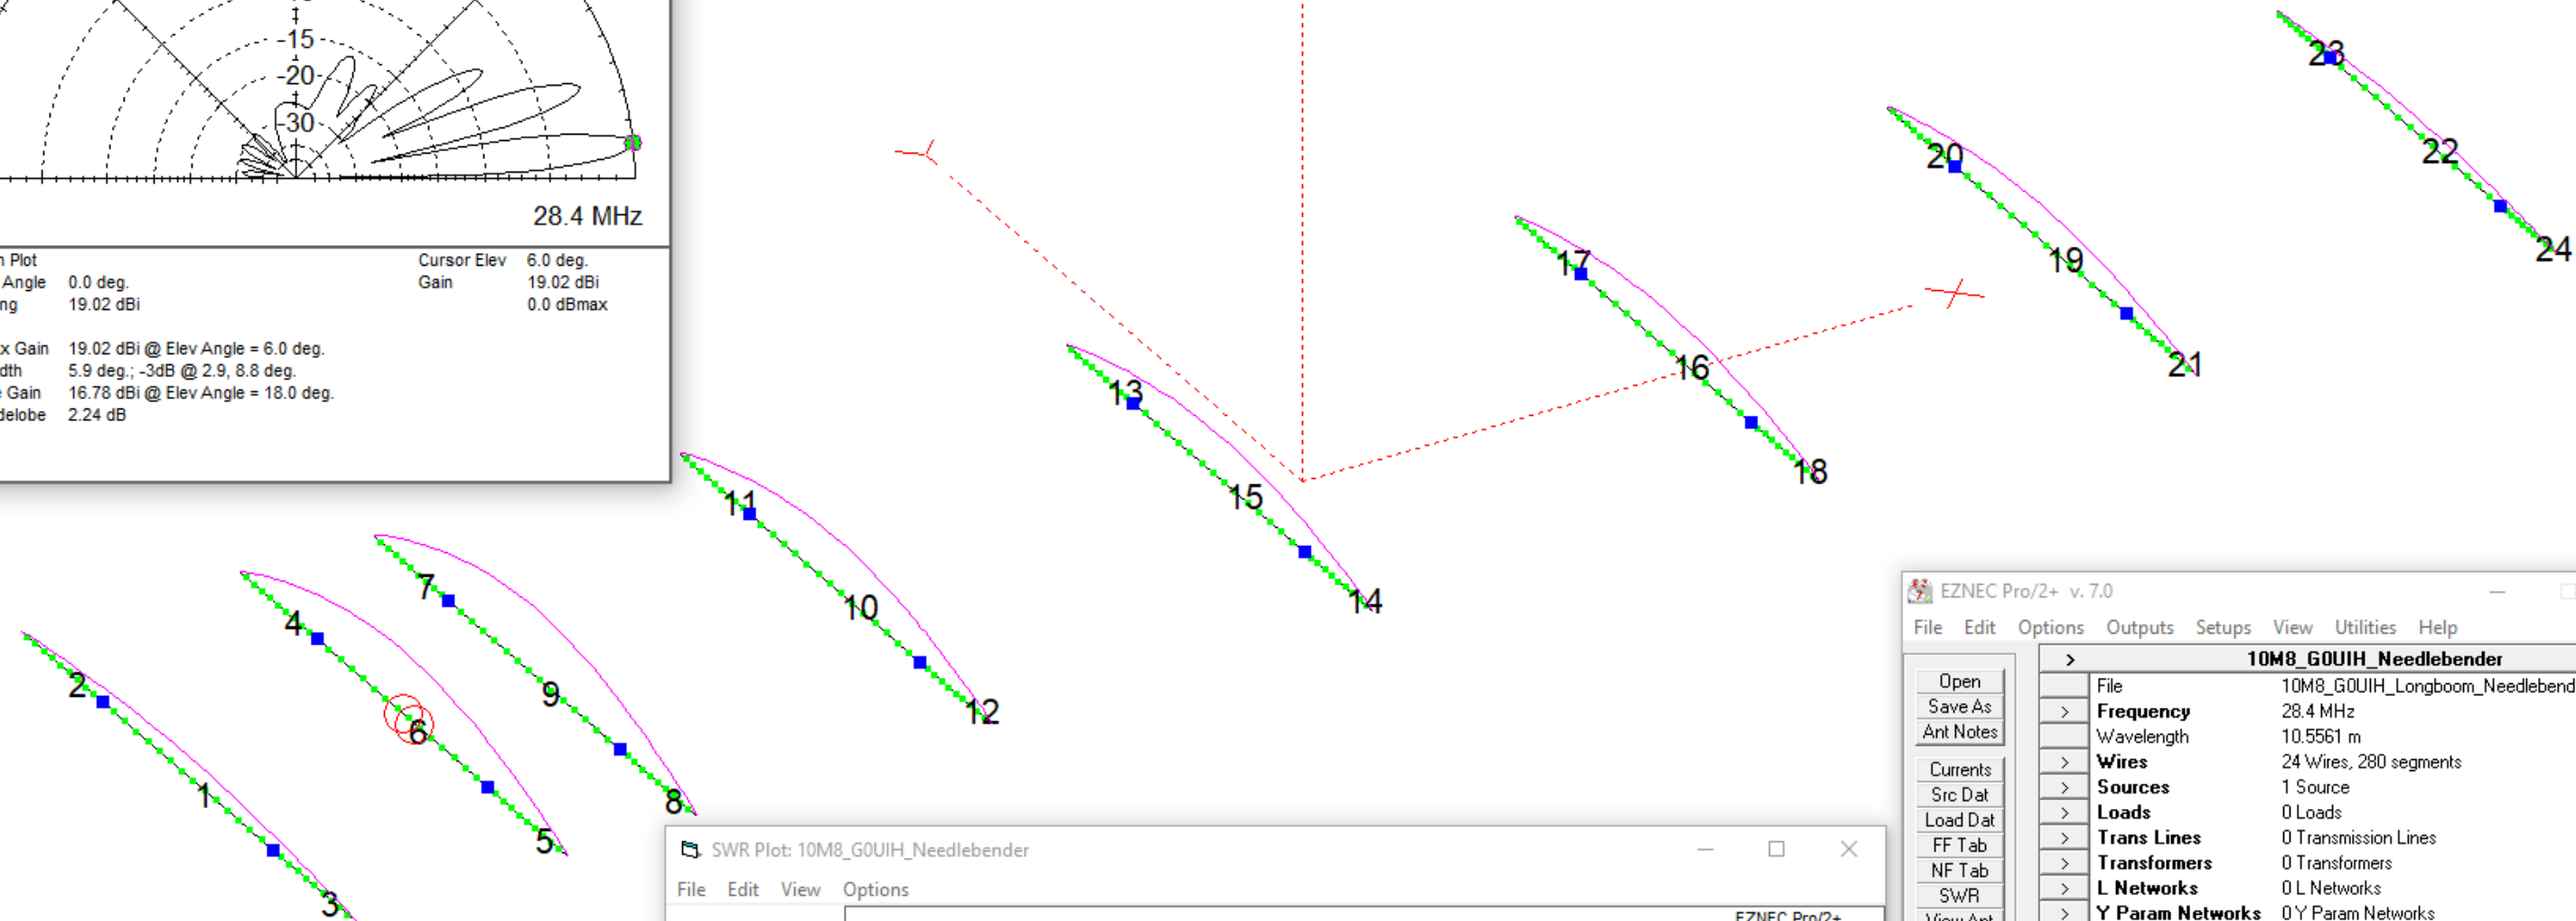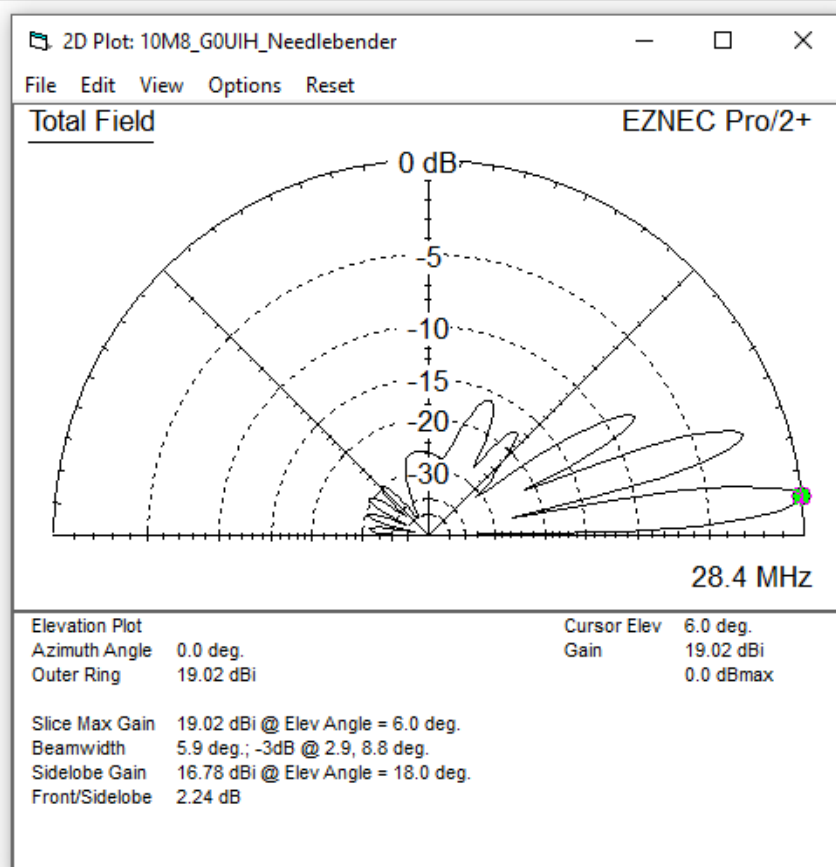

EZNEC Pro/2+ v. 7.0

File Edit Options Outputs Setups View Utilities Help

10M8_G0UIH_Needlebender

- File: 10M8_G0UIH_Longboom_Needlebender.ez
- Frequency: 28.4 MHz
- Wavelength: 10.5561 m
- Wires: 24 Wires, 280 segments
- Sources: 1 Source
- Loads: 0 Loads
- Trans Lines: 0 Transmission Lines
- Transformers: 0 Transformers
- L Networks: 0 L Networks
- Y Param Networks: 0 Y Param Networks
- Ground Type: Real/MININEC
- Ground Descrip: 1 Medium (0.005, 13)
- Wire Loss: Aluminum (6061-T6)
- Units: Meters
- Plot Type: Elevation
- Azimuth Angle: 0 Deg.
- Step Size: 1 Deg.
- Ref Level: 0 dBi
- Alt SWR Z0: 28 ohms
- Desc Options
- Gnd Wave Dist: OFF