


Wires



Wire Create Edit Other

Coord Entry Mode Preserve Connections Show Wire Insulation Show Loss

No.	End 1				End 2				Diameter (mm)	Segs	Insulation		
	X (m)	Y (m)	Z (m)	Conn	X (m)	Y (m)	Z (m)	Conn			Diel C	Thk (mm)	Loss Tan
1	0.181069	-0.14761	0	W3E1	0.181069	0.14761	0	W2E1	16	13	1	0	0
2	0.181069	0.14761	0	W1E2	0.181069	0.506796	0		12	13	1	0	0
3	0.181069	-0.14761	0	W1E1	0.181069	-0.506796	0		12	13	1	0	0
4	0	0.513971	0		0	-0.513971	0		7.93	23	1	0	0
5	0.332615	-0.474051	0		0.332615	-0.474051	0		7.93	23	1	0	0
6	0.826618	-0.456087	0		0.826618	0.456087	0		7.93	23	1	0	0
7	1.34227	-0.441117	0		1.34227	0.441117	0		7.93	23	1	0	0

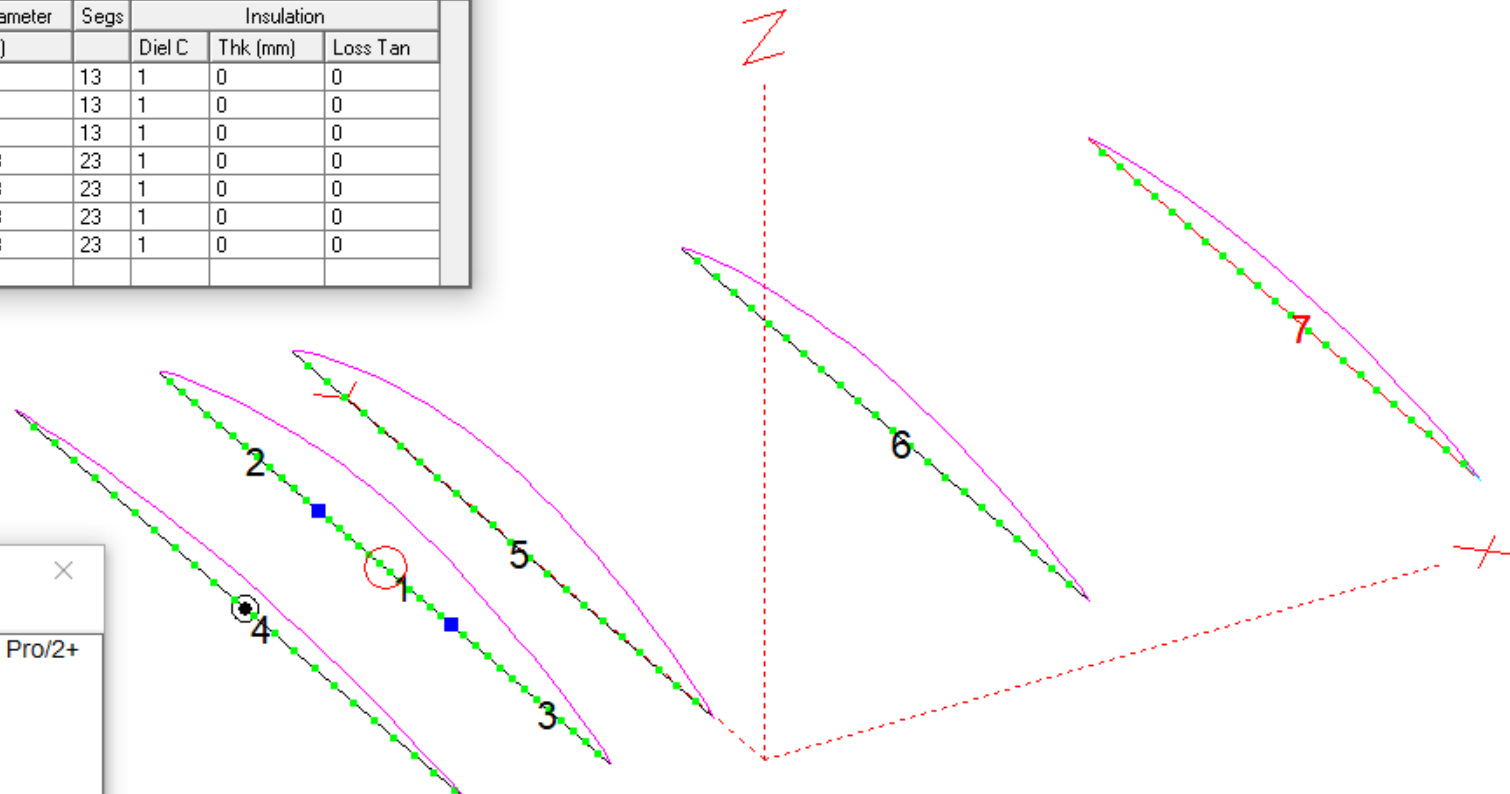

- Center Ant Image
- Mouse Operation
- Normal Viewing
 - Add Conn Wires
 - Move Wire Ends

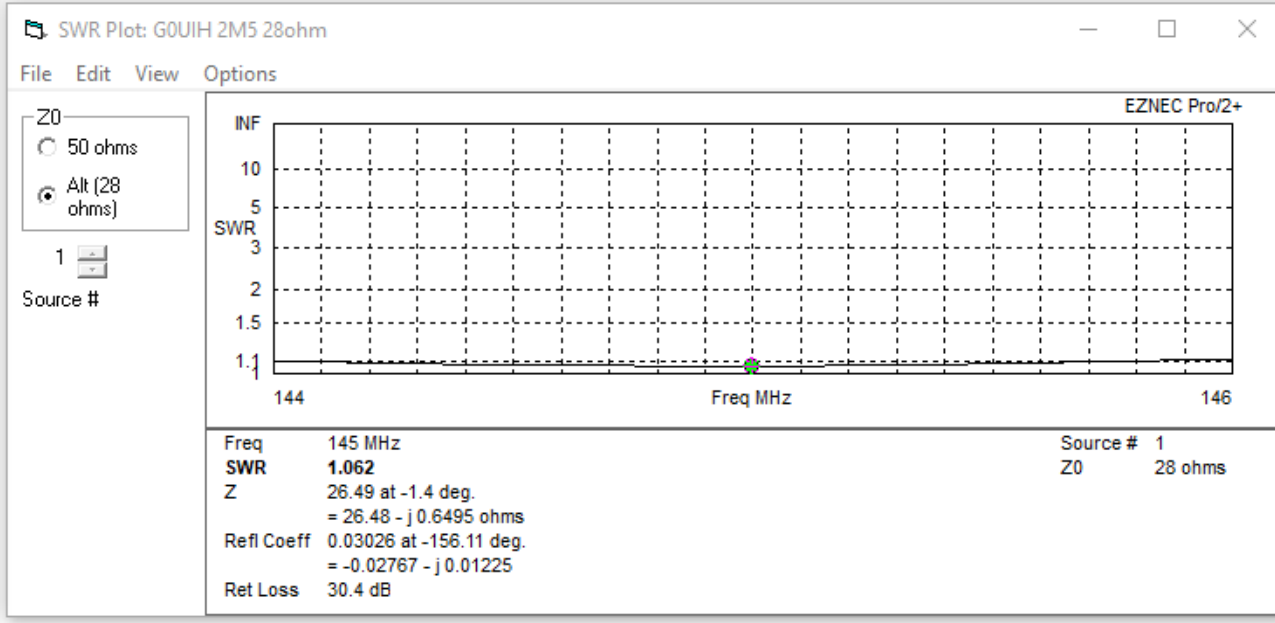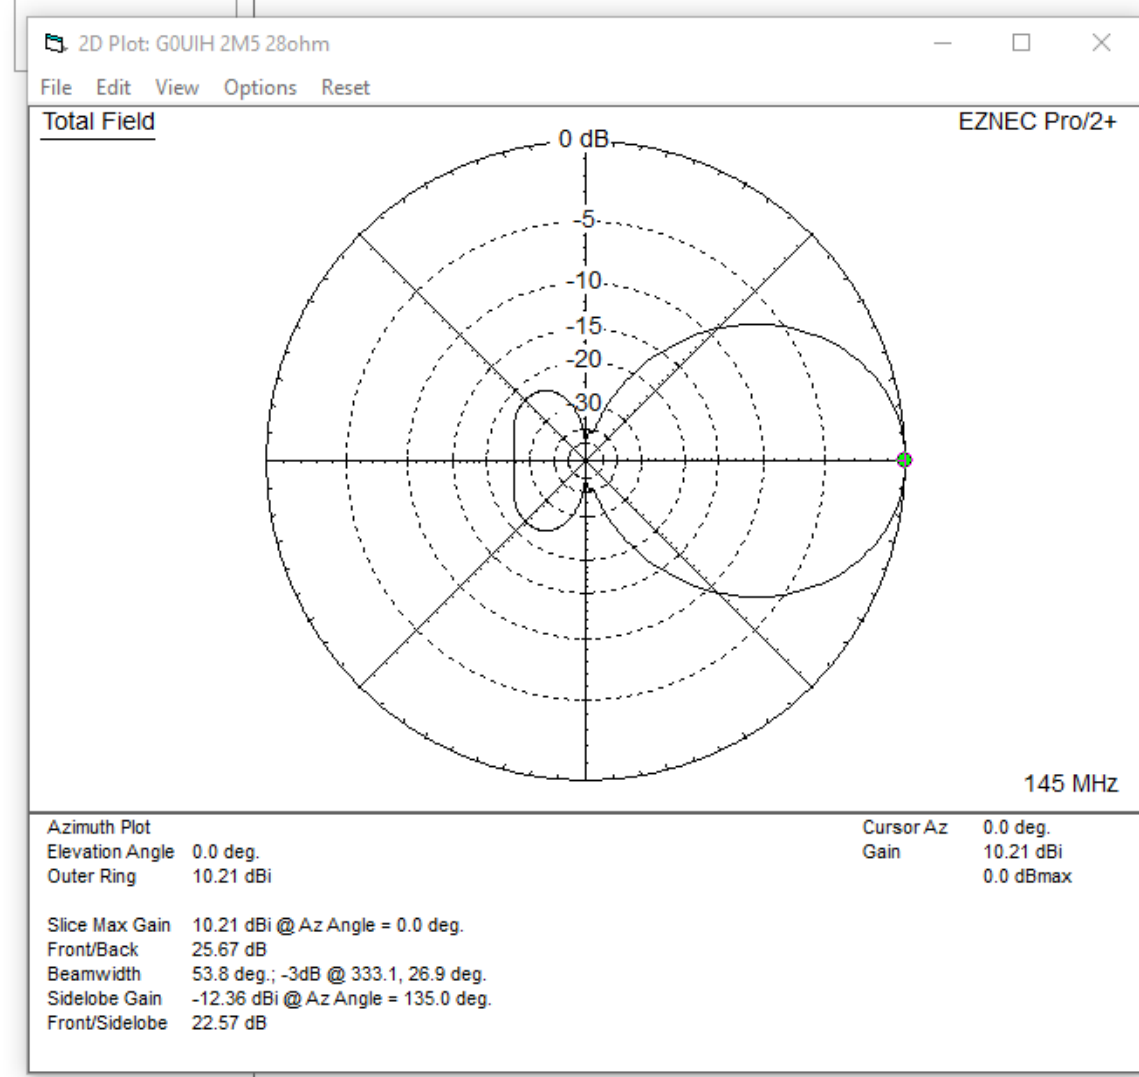

EZNEC Pro/2+ v. 7.0

File Edit Options Outputs Setups View Utilities Help

G0UIH 2M5 28ohm

- File: G0UIH 2M5 28 Ohm.ez
- Frequency: 145 MHz
- Wavelength: 2.06753 m
- Wires: 7 Wires, 131 segments
- Sources: 1 Source
- Loads: 0 Loads
- Trans Lines: 0 Transmission Lines
- Transformers: 0 Transformers
- L Networks: 0 L Networks
- Y Param Networks: 0 Y Param Networks
- Ground Type: Free Space
- Wire Loss: Aluminum (6061-T6)
- Units: Meters
- Plot Type: Azimuth
- Elevation Angle: 0 Deg.
- Step Size: 1 Deg.
- Ref Level: 0 dBi
- Alt SWR Z0: 28 ohms
- Desc Options
- Gnd Wave Dist: OFF